

CHILLING UNITS

Mobile quick-chiller to bring cold packs to the ideal temperature for use and to make sure they stay that way all day long. The specially designed chilling elements guarantee a rapid chilling. Easily moved on the 7½ cm rubber wheels.



3448274 CHILLING UNIT MODEL C-5


STANDARD ACCESSORIES

1468751	Operating manual
3448284	6x Colpac 28x36 cm
3448288	6x Colpac 16x28 cm



OPTIONAL ACCESSORIES

3448288	Colpac 16x28 cm
3448284	Colpac 28x36 cm
3448209	Hot/Cold packs 30x38 cm, 2 pieces
3448208	Hot/Cold packs 13x30 cm, 6 pieces.
3448207	Hot/Cold packs 13x14 cm, 12 pieces
3448130	Towelling holder for 3 packs 3448208

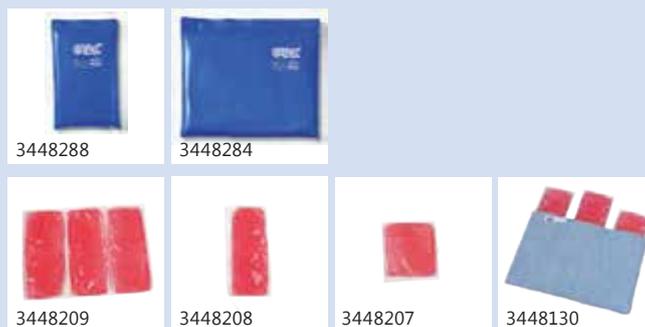

TECHNICAL SPECIFICATIONS

Mains voltage:	220-240 V, 50 Hz
Current:	2 A
Work:	0.14914 kWh of 1/5 hp
Type of refrigerant:	R-134A:
Amount of refrigerant:	0,325L
Test pressure:	high 1.62 MPa (235 psi); low 1.03 MPa (150 psi)
Normal operating temperature:	-12°C tot -6°C
Dimensions (hwxwb):	84 x 41 x 69 cm
Weight:	74 kg